


MARK	DATE	REVISION

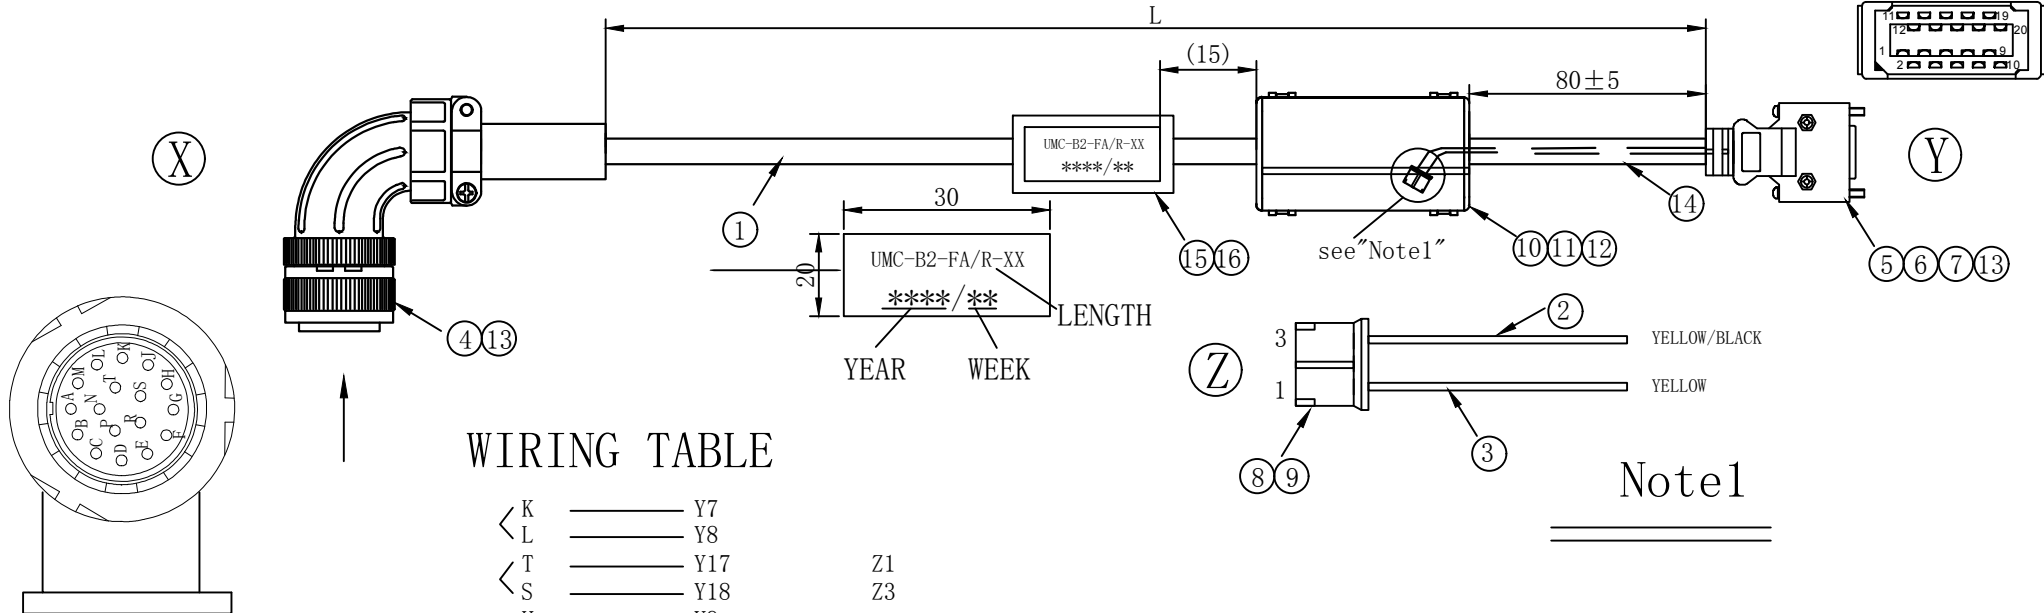

WIRING TABLE

< K	_____	Y7
< L	_____	Y8
< T	_____	Y17
< S	_____	Y18
< H	_____	Y9
< G	_____	Y19
< J	_____	SHELL

Z1
Z3

- 1.NO OPEN、SHORT、MISWIRE & INT.
- 2.CUTTING OFF THE CORE WIRE OF YELLOW AND WHITE AT BOTH SIDES.

16	Label:20*30 Yellow	1PCS
15	H. S Tube:Φ8 CLEAR	0.04M
14	H. S Tube:Φ8 BLACK	0.11M
13	H. S Tube:Φ3 BLACK	0.2M
12	Plastic Clamp: BAT-UNITD1-03	1PCS
11	Screw:GB845-85 M2.9*6	1PCS
10	Battery Box: BAT-UNIT-D1(with label) (ESTUN)	1PCS
9	Terminal:1101T (NSTECH)	2PCS
8	Housing:1101H-03P (NSTECH)	1PCS
7	Rubber Ring: OD=9	1PCS
6	Connector:10120-3000PE (3M)	1PCS
5	Shell:10320-52A0-008 (3M)	1PCS
4	Connector:HMS3108B20-29S	1PCS
3	Wire:UL 1007 24AWG(11/0.16T) YELLOW	0.145M
2	Wire:UL 1007 24AWG(11/0.16T) YELLOW/BLACK	0.145M
1	Cable:(20276-743) 3P*24AWG+1P*20AWG	-M
NO.	DESCRIPTION	QTY.

P/N	LABEL XX	LENGTH L (mm)
UMC-B2-FA/R-03	03	3000±30
UMC-B2-FA/R-05	05	5000±50
UMC-B2-FA/R-10	10	10000±100
UMC-B2-FA/R-15	15	15000±150
UMC-B2-FA/R-20	20	20000±200

Note1

CUSTOMER					
RFQ NO.		P/N		UMC-B2-FA/R-XX	
DRAWN	2019-08-09	SCALE		FREE	
CHECKED		DWG NO.		B190147	
APPROVED	2019-08-09	Rev.	1.0	SHEET	1/1

(Unit: mm)