


| MARK | DATE | REVISION |
|------|------|----------|
| | | |

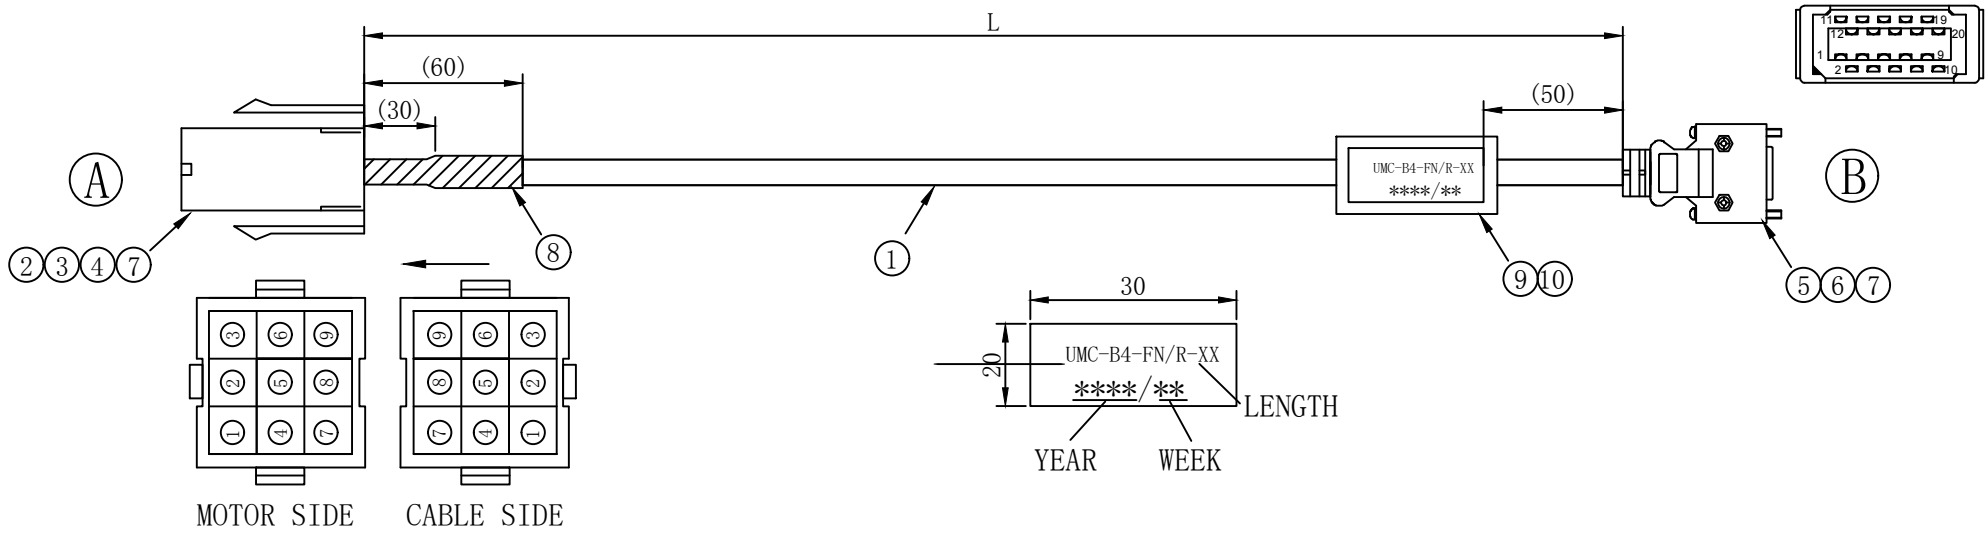

WIRING TABLE

| | | |
|------|-------|--------------|
| < A1 | _____ | B7 |
| < A2 | _____ | B8 |
| < A4 | _____ | B5 |
| < A5 | _____ | B6 |
| < A6 | _____ | B9 |
| < A7 | _____ | B19 |
| A9 | _____ | SHIELD SHELL |

| P/N | LABEL XX | LENGTH L (mm) |
|----------------|----------|---------------|
| UMC-B4-FN-01 | 01 | 1000 ± 10 |
| UMC-B4-FN/R-03 | 03 | 3000 ± 30 |
| UMC-B4-FN/R-05 | 05 | 5000 ± 50 |
| UMC-B4-FN/R-10 | 10 | 10000 ± 100 |
| UMC-B4-FN/R-15 | 15 | 15000 ± 150 |
| UMC-B4-FN/R-20 | 20 | 20000 ± 200 |

1. NO OPEN, SHORT, MISWIRE & INT.
2. CUTTING OFF THE CORE WIRE OF RED AND BLUE AT BOTH SIDES.

| | | |
|-----|-------------------------------------|-------|
| 10 | Label:20*30 Yellow | 1PCS |
| 9 | H. S Tube: Ø8 CLEAR | 0.04M |
| 8 | H. S Tube: Ø8 BLACK | 0.11M |
| 7 | H. S Tube: Ø2 BLACK | 0.1M |
| 6 | Rubber Ring: OD=9 | 1PCS |
| 5 | Connector:SM-20J | 1PCS |
| 4 | Terminal:170362-1 | 3PCS |
| 3 | Terminal:170361-3 | 4PCS |
| 2 | Housing:172161-1 | 1PCS |
| 1 | Cable:(20554-008) 3P*24AWG+1P*21AWG | -M |
| NO. | DESCRIPTION | QTY. |

| | | | | | |
|----------|------------|---------|----------------|-------|-----|
| | | | | | |
| CUSTOMER | | | | | |
| RFQ NO. | | P/N | UMC-B4-FN/R-XX | | |
| DRAWN | 2019-08-09 | SCALE | FREE | | |
| CHECKED | | DWG NO. | B190144 | | |
| APPROVED | 2019-08-09 | Rev. | 1.0 | SHEET | 1/1 |

(Unit: mm)