


MARK	DATE	REVISION

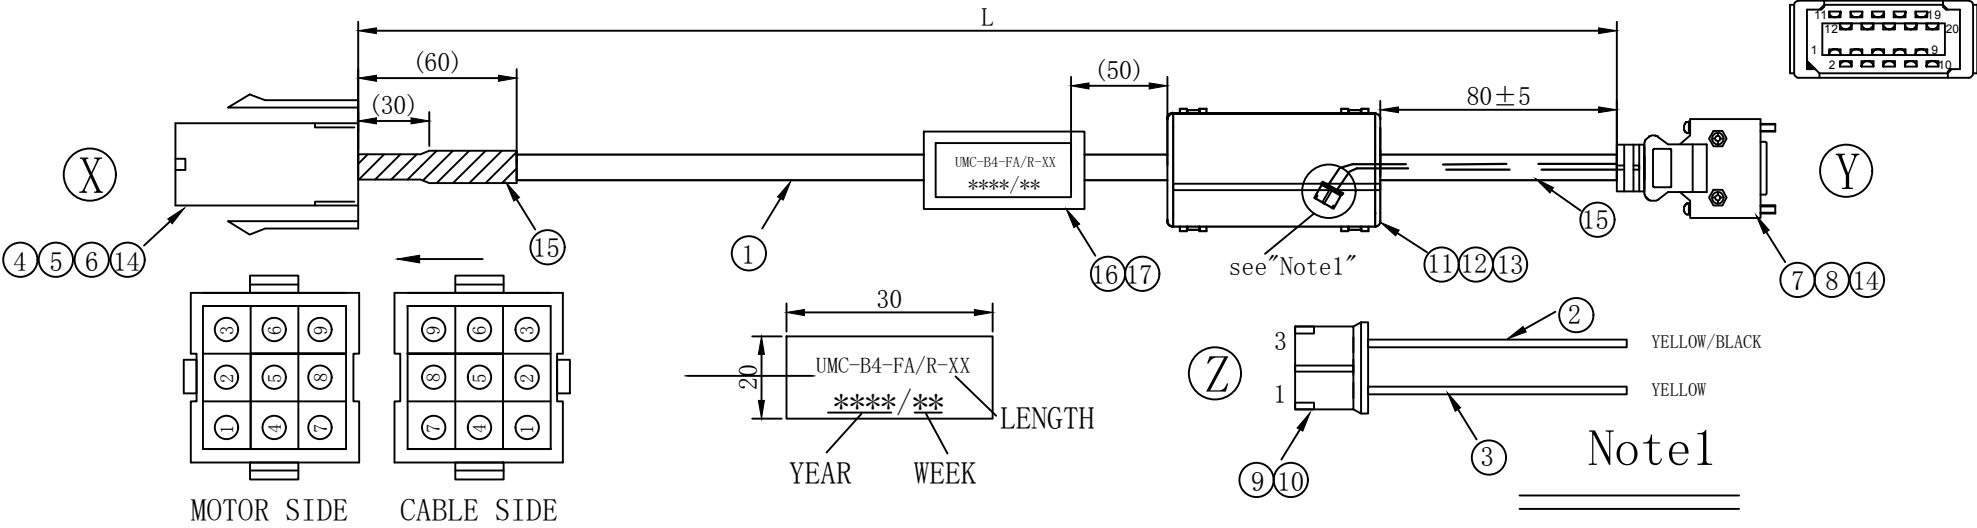

- 1.NO OPEN、SHORT、MISWIRE & INT.
- 2.CUTTING OFF THE CORE WIRE OF YELLOW AND WHITE AT BOTH SIDES.

17	Label:20*30 Yellow	1PCS
16	H. S Tube: \varnothing 8 CLEAR	0.04M
15	H. S Tube: \varnothing 8 BLACK	0.11M
14	H. S Tube: \varnothing 2 BLACK	0.1M
13	Plastic Clamp: BAT-UNITD1-03	1PCS
12	Screw:GB845-85 M2.9*6	1PCS
11	Battery Box: BAT-UNIT-D1(with label) (ESTUN)	1PCS
10	Terminal:1101T (NSTECH)	2PCS
9	Housing:1101H-03P (NSTECH)	1PCS
8	Rubber Ring: OD=9	1PCS
7	Connector:SM-20J	1PCS
6	Terminal:170362-1	3PCS
5	Terminal:170361-3	4PCS
4	Housing:172161-1	1PCS
3	Wire:UL 1007 24AWG(11/0.16T) YELLOW	0.145M
2	Wire:UL 1007 24AWG(11/0.16T) YELLOW/BLACK	0.145M
1	Cable:(20554-008) 3P*24AWG+1P*21AWG	-M
NO.	DESCRIPTION	QTY.

WIRING TABLE

< A1	_____	Y7	
A2	_____	Y8	
< A3	_____	Y17	<u>YELLOW</u> Z1
< A8	_____	Y18	<u>YELLOW/BLACK</u> Z3
< A6	_____	Y9	
A7	_____	Y19	
A9	_____	SHELL	

P/N	LABEL XX	LENGTH L (mm)
UMC-B4-FA-01	01	1000±10
UMC-B4-FA/R-03	03	3000±30
UMC-B4-FA/R-05	05	5000±50
UMC-B4-FA/R-10	10	10000±100
UMC-B4-FA/R-15	15	15000±150
UMC-B4-FA/R-20	20	20000±200

CUSTOMER					
RFQ NO.		P/N	UMC-B4-FA/R-XX		
DRAWN	2019-08-09	SCALE	FREE		
CHECKED		DWG NO.	B190143		
APPROVED	2019-08-09	Rev.	1.0	SHEET	1/1

(Unit: mm)