


MARK	DATE	REVISION

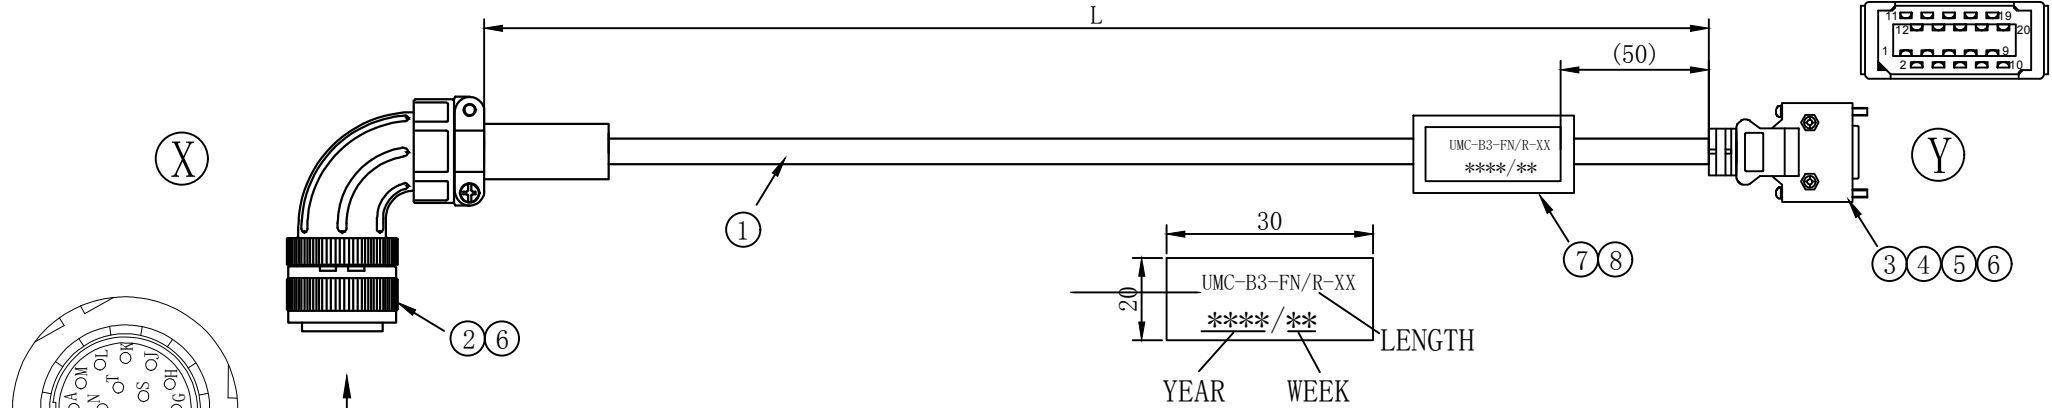

## WIRING TABLE

< K	_____	Y7
< L	_____	Y8
< N	_____	Y5
< P	_____	Y6
< H	_____	Y9
< G	_____	Y19
J	SHIELD	SHELL

P/N	LABEL XX	LENGTH L (mm)
UMC-B3-FN/R-03	03	3000±30
UMC-B3-FN/R-05	05	5000±50
UMC-B3-FN/R-10	10	10000±100
UMC-B3-FN/R-15	15	15000±150
UMC-B3-FN/R-20	20	20000±200

- 1.NO OPEN、SHORT、MISWIRE & INT.
- 2.CUTTING OFF THE CORE WIRE OF RED AND BLUE AT BOTH SIDES.

8	Label:20*30 Yellow	1PCS
7	H. S Tube:Φ8 CLEAR	0.04M
6	H. S Tube:Φ3 BLACK	0.2M
5	Rubber Ring: OD=9	1PCS
4	Connector:10120-3000PE (3M)	1PCS
3	Shell:10320-52A0-008 (3M)	1PCS
2	Connector:HMS3108B20-29S	1PCS
1	Cable:(20276-743) 3P*24AWG+1P*20AWG	-M
NO.	DESCRIPTION	QTY.

(Unit: mm)



CUSTOMER			
RFQ NO.		P/N	UMC-B3-FN/R-XX
DRAWN	2019-08-09	SCALE	FREE
CHECKED		DWG NO.	B190148
APPROVED	2019-08-09	Rev.	1.0 SHEET 1/1